

Test Verification of Conformity


On the basis of the referenced test report(s), the sample(s) of the below product has been found to comply with the relevant harmonized standard(s) to the directive(s) listed on this verification at the time the tests were carried out. The manufacturer may indicate compliance to only the said directives by signing a DoC himself and may affix the CE marking to products identical to the tested sample(s) if the product complies with all CE marking directives that has the product in their scope. In addition, the manufacturer shall file and keep the documentation according to the rules of the applicable directive(s) and shall consider changes of the standards as they may occur. Additional requirements, additional directives and local laws may be applicable.

Applicant Name & Address : GUANGDONG BE-TECH SECURITY SYSTEMS CO., LTD.
No. 17, Keyuan 3 Road, Ronggui, Shunde High-Tech Zone,
Foshan, Guangdong, P.R.China

Product(s) Tested : Electronic hotel in-room safe

Ratings and principal characteristics : DC 6V

Model(s) : 3001D-1HL、3001D-3HL、3001D-3HLC、3001D-5HL、3001D-5HLC

Brand name : 

Relevant Standard(s) / Specification(s) / Directive(s) : EN 61000-6-1: 2007/ Electromagnetic compatibility (EMC) — Part 6-1: Generic standards — Immunity for residential, commercial and light-industrial environments

EN 61000-6-3: 2007/ Electromagnetic compatibility (EMC) — Part 6-3: Generic standards — Emission standard for residential, commercial and light-industrial environments

EMC Directive 2004/108/EC

Verification Issuing Office Name & Address : Same as Legal Entity

Verification/Report Number(s) : GZ12040054-2/ GZ12040054-2

Note 1 : This verification is part of the full test report(s) and should be read in conjunction with it.

This Verification is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Verification. Only the Client is authorized to copy or distribute this Verification. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this Verification are relevant only to the sample tested. This Verification by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



Signature

Name: Carrie Chen
Position: Technical Supervisor
Date: 16 April, 2012

TEST REPORT

Applicant Name & Address : GUANGDONG BE-TECH SECURITY SYSTEMS CO., LTD.
No. 17, Keyuan 3 Road, Ronggui, Shunde High-Tech Zone, Foshan, Guangdong, P.R.China

Manufacturing Site : GUANGDONG BE-TECH SECURITY SYSTEMS CO., LTD.
No. 17, Keyuan 3 Road, Ronggui, Shunde High-Tech Zone, Foshan, Guangdong, P.R.China

Sample Description
Product : Electronic hotel in-room safe
Model No. : 3001D-1HL、3001D-3HL、3001D-3HLC、3001D-5HL、3001D-5HLC
Electrical Rating : DC 6V

Date Received : 06 April 2012

Date Test Conducted : 07 April 2012-10 April 2012

Test standards : EN 61000-6-1: 2007
EN 61000-6-3: 2007


Test Result : Pass

Conclusion : The submitted samples complied with the above EMC standards.

Remark : None.

*****End of Page*****

Prepared and Checked By:



Fvan Tu
Engineer
Intertek Guangzhou

Approved By:



Carrie Chen
Technical Supervisor
Intertek Guangzhou
16 April 2012 **Date**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
Tel / Fax: 86-20-8213 9688/86-20-3205 7538

CONTENT

TEST REPORT	1
CONTENT	2
1 TEST RESULTS SUMMARY	3
2 EMC RESULTS CONCLUSION	4
3 LABORATORY MEASUREMENTS	5
4 EMI TEST	6
4.1 EN 61000-6-3 CONTINUOUS CONDUCTED DISTURBANCE VOLTAGE TEST	6
4.2 EN 61000-6-3 DISCONTINUOUS CONDUCTED DISTURBANCE VOLTAGE	6
4.3 EN 61000-6-3 COMMON MODE CONDUCTED DISTURBANCE VOLTAGE AT TELECOM. PORTS	6
4.4 EN 61000-6-3 COMMON MODE DISTURBANCE CURRENT AT TELECOM. PORTS	6
4.5 EN 61000-6-3 RADIATED EMISSION	7
4.5.1 <i>Used Test Equipment</i>	7
4.5.2 <i>Block Diagram of Test Setup</i>	7
4.5.3 <i>Test Setup and Procedure</i>	8
4.5.4 <i>Test Data</i>	8
4.5.5 <i>Test Curve</i>	9
4.5.6 <i>Measurement uncertainty</i>	9
5 HARMONIC OF CURRENT	9
6 FLICKER	9
7 EMS TEST	10
7.1 EN 61000-4-2(PURSUANT TO EN 61000-6-1) ELECTROSTATIC DISCHARGE IMMUNITY	10
7.1.1 <i>Used Test Equipment</i>	10
7.1.2 <i>Block Diagram of Test Setup</i>	11
7.1.3 <i>Test Setup and Procedure</i>	11
7.1.4 <i>Test Result</i>	13
7.2 EN 61000-4-6(PURSUANT TO EN 61000-6-1) INJECTED CURRENT (0.15 MHz TO 80 MHz)	14
7.3 EN 61000-4-4(PURSUANT TO EN 61000-6-1) ELECTRICAL FAST TRANSIENT/BURST	14
7.4 EN 61000-4-5(PURSUANT TO EN 61000-6-1) SURGE IMMUNITY	14
7.5 EN 61000-4-11(PURSUANT TO EN 61000-6-1) VOLTAGE DIPS AND INTERRUPTIONS	14
7.6 EN 61000-4-3(PURSUANT TO EN 61000-6-1) RADIATED ELECTROMAGNETIC FIELD IMMUNITY	15
7.6.1 <i>Used Test Equipment</i>	15
7.6.2 <i>Block Diagram of Test Setup</i>	15
7.6.3 <i>Test Setup and Procedure</i>	16
7.6.4 <i>Test Result</i>	17
7.7 EN 61000-4-8(PURSUANT TO EN 61000-6-1) POWER FREQUENCY MAGNETIC FIELD IMMUNITY	17
8 APPENDIX I - PHOTOS OF TEST SETUP	18
9 APPENDIX II - PHOTOS OF EUT	20

1

TEST RESULTS SUMMARY

Test Item	Standard	Result
Continuous conducted disturbance voltage	EN 61000-6-3:2007 Reference: EN 55022: 2006	N/A
Discontinuous conducted disturbance voltage	EN 61000-6-3:2007 Reference: EN 55014: 2006	N/A
Common Mode Conducted Disturbance Voltage at Telecom. Ports	EN 61000-6-3:2007 Reference: EN 55022: 2006	N/A
Common Mode Disturbance Current at Telecom. Ports	EN 61000-6-3:2007 Reference: EN 55022: 2006	N/A
Radiated emission	EN 61000-6-3:2007 Reference: EN 55022: 2006	Pass
Harmonic of current	EN 61000-6-3:2007 Reference: EN 61000-3-2: 2006	N/A
Flicker	EN 61000-6-3:2007 Reference: EN 61000-3-3: 1995+A1: 2001+A2: 2005	N/A
ESD immunity	EN 61000-6-1:2007 Reference: EN 61000-4-2: 1995+A1: 1998+A2: 2001	Pass
Inject current immunity	EN 61000-6-1:2007 Reference: EN 61000-4-6: 2007	N/A
Surge immunity	EN 61000-6-1:2007 Reference: EN 61000-4-5: 2006	N/A
EFT immunity	EN 61000-6-1:2007 Reference: EN 61000-4-4: 2004	N/A
Radiated EM field immunity	EN 61000-6-1:2007 Reference: EN 61000-4-3: 2006	Pass
Voltage dips and interruption immunity	EN 61000-6-1:2007 Reference: EN 61000-4-11: 2004	N/A
Power frequency magnetic field immunity	EN 61000-6-1:2007 Reference: EN 61000-4-8: 1993+A1: 2000	N/A

Remark: 1. The symbol "N/A" in above table means Not Applicable.

2. When determining the test results, measurement uncertainty of tests has been considered.

2**EMC Results Conclusion**
(with Justification)

RE: EMC Testing Pursuant to EMC Directive 2004/108/EC Performed On the Electronic hotel in-room safe, Models: 3001D-1HL, 3001D-3HL, 3001D-3HLC, 3001D-5HL, 3001D-5HLC.

We tested the Electronic hotel in-room safe, Model: 3001D-3HLC, to determine if it was in compliance with the relevant EN standards as marked on the Test Results Summary. We found that the unit met the requirement of EN 61000-6-3, EN 61000-6-1 (EN 61000-4-2), EN 61000-6-1 (EN 61000-4-3) standards when tested as received. The worst case's test data was presented in this test report. Test items Radiated Emission and Radiated EM field Immunity were subcontracted.

All models are the same except the size and appearance. Model 3001D-3HLC selected for testing.

The production units are required to conform to the initial sample as received when the units are placed on the market.

3**LABORATORY MEASUREMENTS****Configuration Information**

Equipment Under Test (EUT):	Electronic hotel in-room safe
Model:	3001D-3HLC
Serial No.	Not Labeled
Support Equipment:	N/A
Rated Voltage:	DC 6V
Condition of Environment:	Temperature : 22~28°C Relative Humidity: 35~60% Atmosphere Pressure : 86~106kPa

Notes:

1. The EMI measurements had been made in the operating mode producing the largest emission in the frequency band being investigated consistent with normal applications.
An attempt had be made to maximize the emission by varying the configuration of the EUT.
2. The EMS measurements had been made in the frequency bands being investigated, with the EUT in the most susceptible operating mode consistent with normal applications. The configuration of the test sample had been varied to achieve maximum susceptibility.

4 EMI TEST**4.1 EN 61000-6-3 Continuous Conducted Disturbance Voltage Test****Test Result: Not Applicable****4.2 EN 61000-6-3 Discontinuous Conducted Disturbance Voltage****Test Result: Not Applicable****4.3 EN 61000-6-3 Common Mode Conducted Disturbance Voltage at Telecom. Ports****Test Result: Not Applicable****Remark:** The test only apply to balanced telecommunication ports intended for connection to unshielded balanced pairs**4.4 EN 61000-6-3 Common Mode Disturbance Current at Telecom. Ports****Test Result: Not Applicable****Remark:** The test only apply to balanced telecommunication ports intended for connection to shielded cables and coaxial cables


4.5 EN 61000-6-3 Radiated Emission

Test Result: Pass

4.5.1 Used Test Equipment

Equip. No.	Equipment	Model	Manufacturer
100106	EMI Receiver	ESU40	Rohde & Schwarz
75971	Antenna	3142C	ETS-LINDGREN
3730	Semi-Anechoic Chamber	RFD-F/A-100	ETS-LINDGREN

4.5.2 Block Diagram of Test Setup

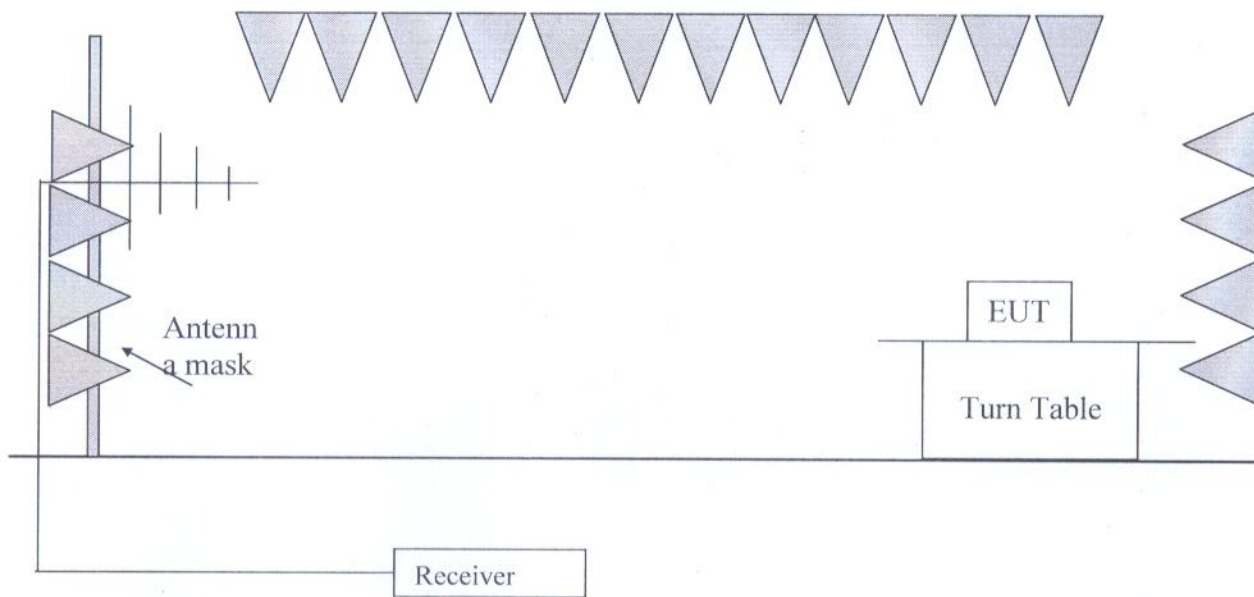

4.5.3 Test Setup and Procedure

The measurement was applied in a semi-anechoic chamber. The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mask. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.


Broadband antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to EN55022 requirement during radiated test. The bandwidth setting on R&S Test Receiver was 120 kHz. The frequency range from 30MHz to 1000MHz was checked

4.5.4 Test Data


Antenna Polarization	Frequency [MHz]	Measured Net at 3m [dB(μV/m)]	Limit at 3m [dB(μV/m)]
Horizontal	200.0	<30	40.0
Horizontal	400.0	<37	47.0
Horizontal	800.0	<37	47.0
Vertical	200.0	<30	40.0
Vertical	400.0	<37	47.0
Vertical	800.0	<37	47.0

4.5.5 Test Curve

Horizontal

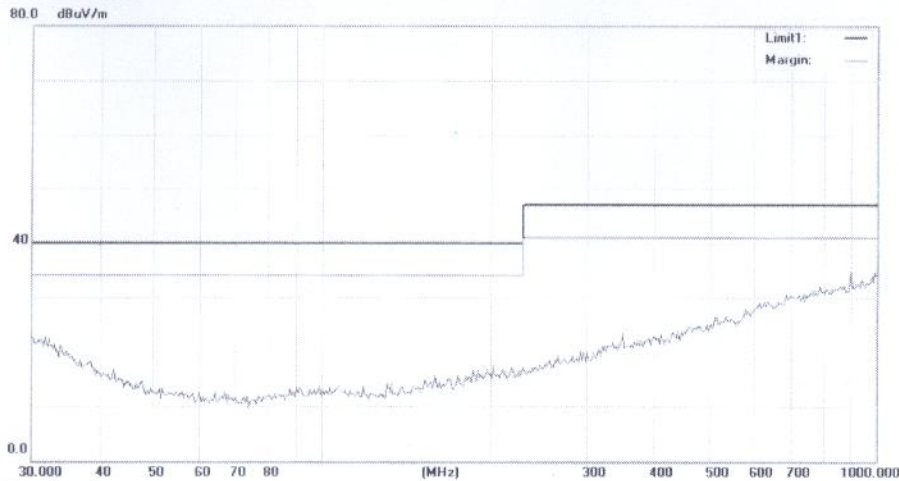

Vertical

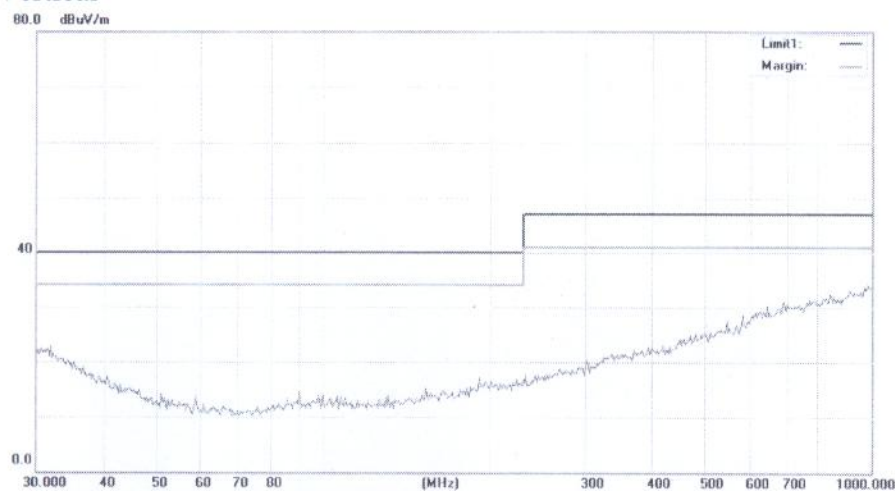

4.5.6 Measurement uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty is calculated in accordance with CISPR 16-4-2:2003.

Measurement uncertainty of radiated emission: 4.4 dB.

The measurement uncertainty is given with a confidence of 95%, $k=2$.

5 Harmonic of Current

Test Result: Not Applicable

6 Flicker

Test Result: Not Applicable

7 EMS TEST

Performance Criteria:

Criterion A: The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permission loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and from what the user may reasonably expect from the apparatus if used as intended.

Criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permission loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description, and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Criterion C: Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instruction for use.

Measurement Uncertainty

According to CISPR 16-4-2:2003, measurement uncertainty to immunity test is under consideration.

7.1 EN 61000-4-2(Pursuant to EN 61000-6-1) Electrostatic Discharge Immunity

Tested Port: Enclosure


Performance criterion: B

Test Result: Pass

7.1.1 Used Test Equipment

Equip. No.	Equipment	Model	Manufacturer
EM077-02	ESD Simulator	NSG435	SCHAFFNER

7.1.2 Block Diagram of Test Setup

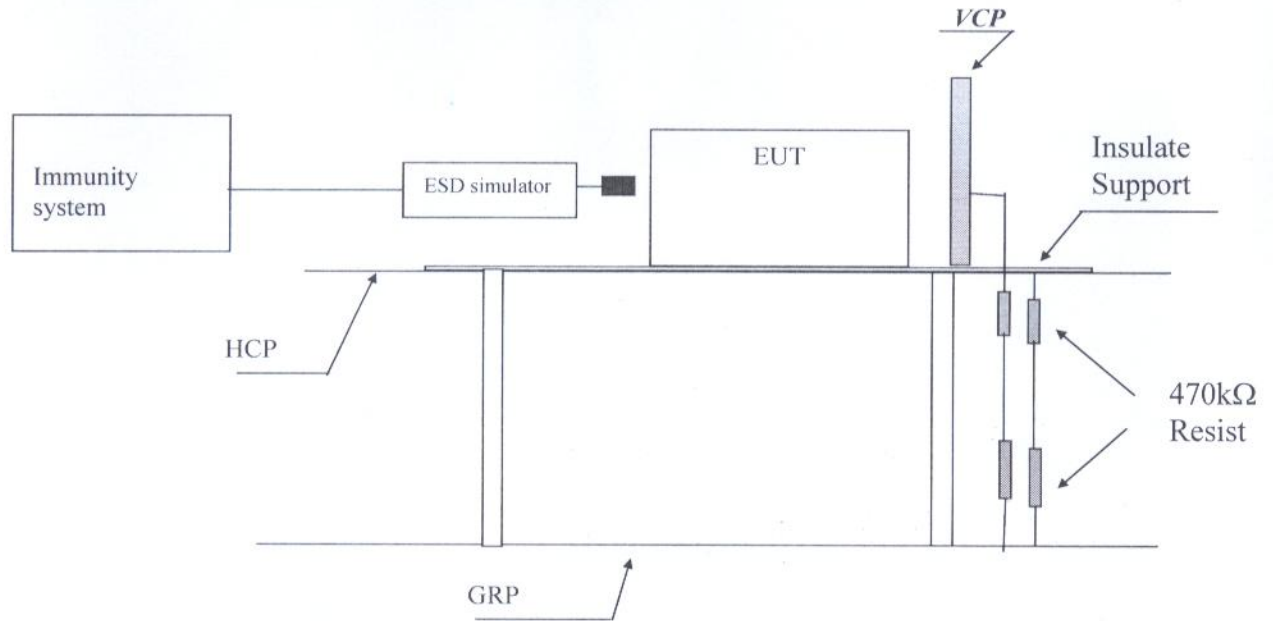

Note: HCP means Horizontal Coupling Plane,
 VCP means Vertical Coupling Plane
 GRP means Ground Reference Plane

7.1.3 Test Setup and Procedure

The EUT was put on a 0.8m high wooden table/0.1m high for floor standing equipment standing on the ground reference plane (GRP) 3m by 2m in size, made by iron 1.0 mm thick.

A horizontal coupling plane (HCP) 1.6m by 0.8m in size was placed on the table, and the EUT with its cables were isolated from the HCP by an insulating support thick than 0.5mm. The VCP 0.5m by 0.5m in size & HCP were constructed from the same material type & thickness as that of the GRP, and connected to the GRP via a 470kΩ resistor at each end.

The distance between EUT and any of the other metallic surface excepted the GRP, HCP & VCP was greater than 1m.

The EUT was arranged and connected according to its functional requirements.
 The EUT was arranged and connected according to its functional requirements

Direct static electricity discharges was applied only to those points and surface which are accessible to personnel during normal usage.

Test voltage was increased from the minimum to the selected test level and with single discharge.

On each preselected points 10 times of each polarity single discharge were applied. The time interval between successive single discharges is 1s.

The ESD generator was held perpendicular to the surface to which the discharge is applied. The discharge return cable of the generator was kept at a distance of 0.2m whilst the discharge is being applied. During the contact discharges, the tip of the discharge electrode was touch the EUT before the discharge switch is operated. During the air discharges, the round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT.

Indirect discharge was conducted to objects placed near the EUT, simulated by applying the discharges of the ESD generator to a coupling plane, in the contact discharge mode.

After each discharge, the ESD generator was removed from the EUT, the generator is then retriggered for a new single discharge. For ungrounded product, a grounded carbon fibre brush with bleeder resistors ($2 \times 470 \text{ k}\Omega$) in the grounding cable was used after each discharge to remove remnant electrostatic voltage.

10 times of each polarity single discharge were applied to HCP and VCP. The detail selected points are listed in the following table.

7.1.4 Test Result

Direct Application of ESD

Direct Contact Discharge

Applied Voltage (kV)	No. of Discharge for each point	Result	Discharged Points
4	20	Pass	Accessible metal parts of the EUT Conductive substrate with coating which is not declared to be insulating

Direct Air Discharge

Applied Voltage (kV)	No. of Discharge for each point	Result	Discharged Points
8	20	Pass	All accessible points where contact discharge cannot be applied such as Displays, Indicators light, Keyboard, Button, Switch, Knob, Air gap, Slots, Hole and so on

Indirect Application of ESD

Horizontal Coupling Plane under the EUT

Applied Voltage (kV)	No. of Discharge for each point	Result	Discharged Point
4	20	Pass	At the front edge of each HCP opposite the centre point of each unit of the EUT

Vertical Coupling Plane beside the EUT

Applied Voltage (kV)	No. of Discharge for each point	Result	Discharged Point
4	20	Pass	The centre of the vertical edge of the coupling plane

- 7.2 EN 61000-4-6(Pursuant to EN 61000-6-1) Injected Current (0.15 MHz to 80 MHz)
Tested Port: AC power DC power Functional earth Signal/Control
Performance criterion: A
Test Result: Not Applicable
- 7.3 EN 61000-4-4(Pursuant to EN 61000-6-1) Electrical Fast Transient/Burst
Tested Port: AC power DC power Functional earth Signal/Control
Performance criterion: B
Test Result: Not Applicable
- 7.4 EN 61000-4-5(Pursuant to EN 61000-6-1) Surge Immunity
Tested Port: AC power DC power
Performance criterion: B
Test Result: Not Applicable
- 7.5 EN 61000-4-11(Pursuant to EN 61000-6-1) Voltage Dips and Interruptions
Tested Port: AC power
Performance criterion: B (only for test level of 70%Ut with 0.5 cycle), C
Test Result: Not Applicable

7.6 EN 61000-4-3(Pursuant to EN 61000-6-1) Radiated Electromagnetic Field Immunity

Tested Port: Enclosure


Performance criterion: A

Test Result: Pass

7.6.1 Used Test Equipment

Equipment No.	Equipment	Model	Manufacturer
103002	Signal generator	SML03	Rohde & Schwarz
10543	Power Meter	4232A	BOOTON
0611-768	Power Amplifier	AP32DT214	PRAnA
0611-767	Power Amplifier	AP32SV150A	PRAnA
75971	Double Log.-Per. Antenna	STLP9128E	SCHWARZBECK
BBHA9120E318/ 0899	Horn Antenna	BBHA 9120 E	SCHWARZBECK

7.6.2 Block Diagram of Test Setup

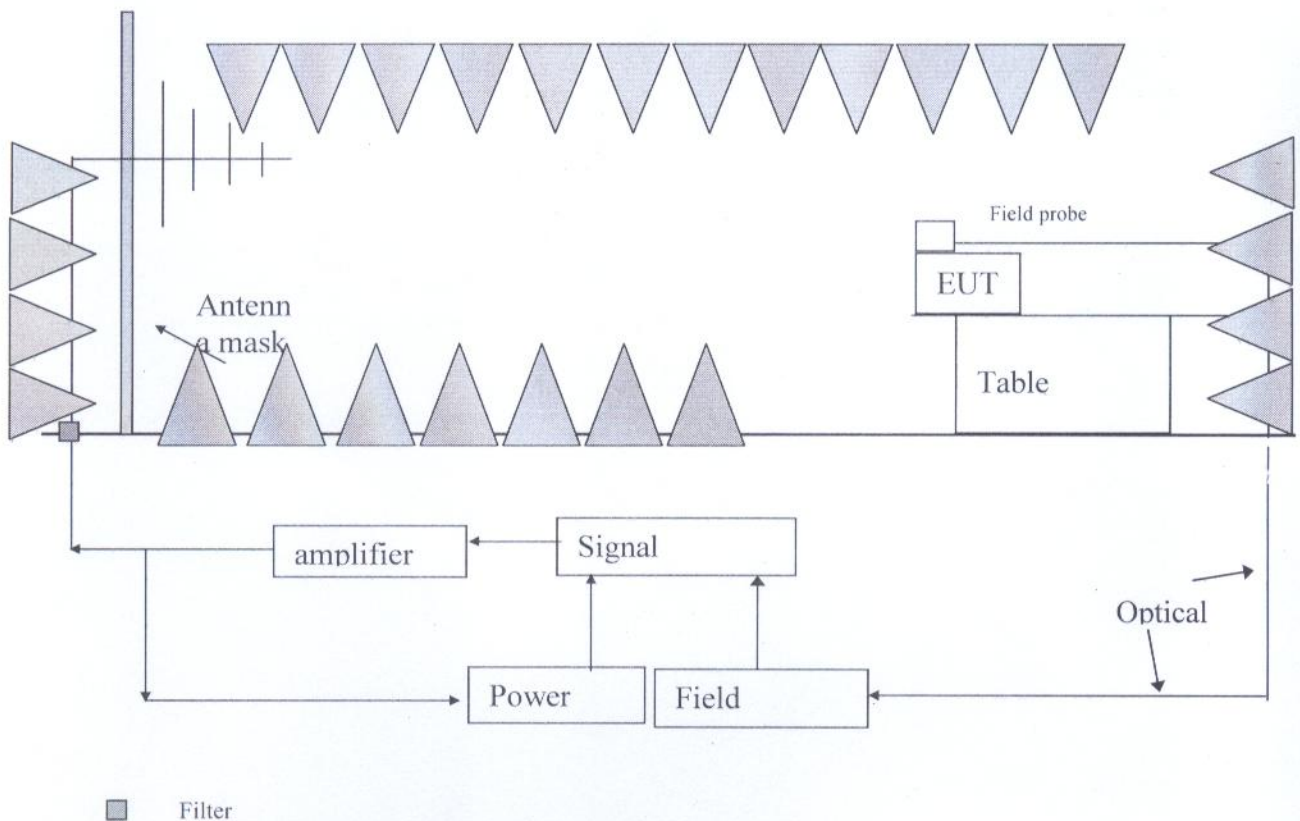

7.6.3 Test Setup and Procedure

The test was conducted in an fully anechoic chamber to maintain a uniform field of sufficient dimensions with respect to the EUT, and also in order to comply with various national and international laws prohibiting interference to radio communications.

The equipment is placed in the test facility on a non-conducting table 0.8m high (for floor standing EUT, is placed on a non-conducting support 0.1m height).

The EUT was placed on the uniform calibrated plane which is 3V/m and 1V/mEM field.

For all ports connected to EUT, manufacturer specified cable type and length was used, for those cables no specification, unshielded cable applied.

Wire is left exposed to the electromagnetic field for a distance of 1m from the EUT.

The EUT was arranged and connected according to its functional requirements

Before testing, the intensity of the established field strength have been checked by placing the field sensor at a calibration grid point, and with the field generating antenna and cables in the same positions as used for the calibration, the forward power needed to give the calibrated field strength was measured.

Spot checks was made at a number of calibration grid points over the frequency range 80 to 1000MHz and 1.4 to 2.7 GHz, both polarizations was checked.

After calibration, the EUT is initially placed with one face coincident with the calibration plane.

The frequency range is swept from 80 to 1000MHz and 1.4 to 2.7 GH, with the signal 80% amplitude modulated with a 1 kHz sinewave, pausing to adjust the r.f. signal level.

The dwell time at each frequency was 3s so as that the EUT to be exercised and be able to respond.

The step size was 1% of the fundamental with linear interpolation between calibrated points. Test was performed with the generating antenna facing each of the four sides of the EUT.

7.6.4 Test Result

Frequency (MHz)	Exposed Side	Field Strength (V/m)	Result
80 to 1000	Front	3V/m (r.m.s.)	Pass
80 to 1000	Left	3V/m (r.m.s.)	Pass
80 to 1000	Rear	3V/m (r.m.s.)	Pass
80 to 1000	Right	3V/m (r.m.s.)	Pass

Frequency (GHz)	Exposed Side	Field Strength (V/m)	Result
1.4 to 2.0	Front	3V/m (r.m.s.)	Pass
1.4 to 2.0	Left	3V/m (r.m.s.)	Pass
1.4 to 2.0	Rear	3V/m (r.m.s.)	Pass
1.4 to 2.0	Right	3V/m (r.m.s.)	Pass

Frequency (GHz)	Exposed Side	Field Strength (V/m)	Result
2.0 to 2.7	Front	1V/m (r.m.s.)	Pass
2.0 to 2.7	Left	1V/m (r.m.s.)	Pass
2.0 to 2.7	Rear	1V/m (r.m.s.)	Pass
2.0 to 2.7	Right	1V/m (r.m.s.)	Pass

7.7 EN 61000-4-8(Pursuant to EN 61000-6-1) Power Frequency Magnetic Field Immunity


Tested Port: Enclosure

Performance criterion: A


Test Result: Not Applicable

8 Appendix I - Photos of test setup


Radiated Emission

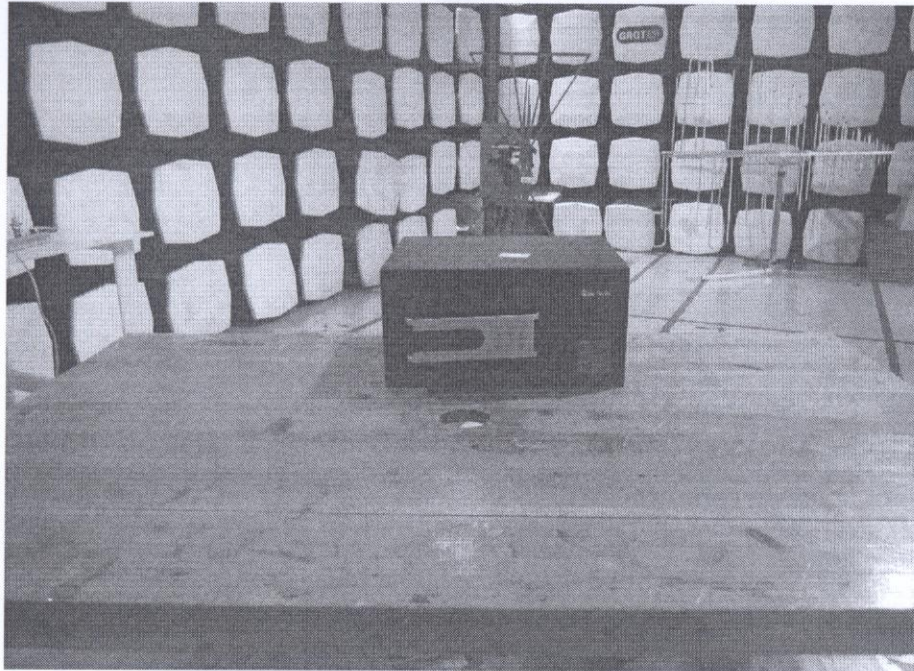

ESD Immunity

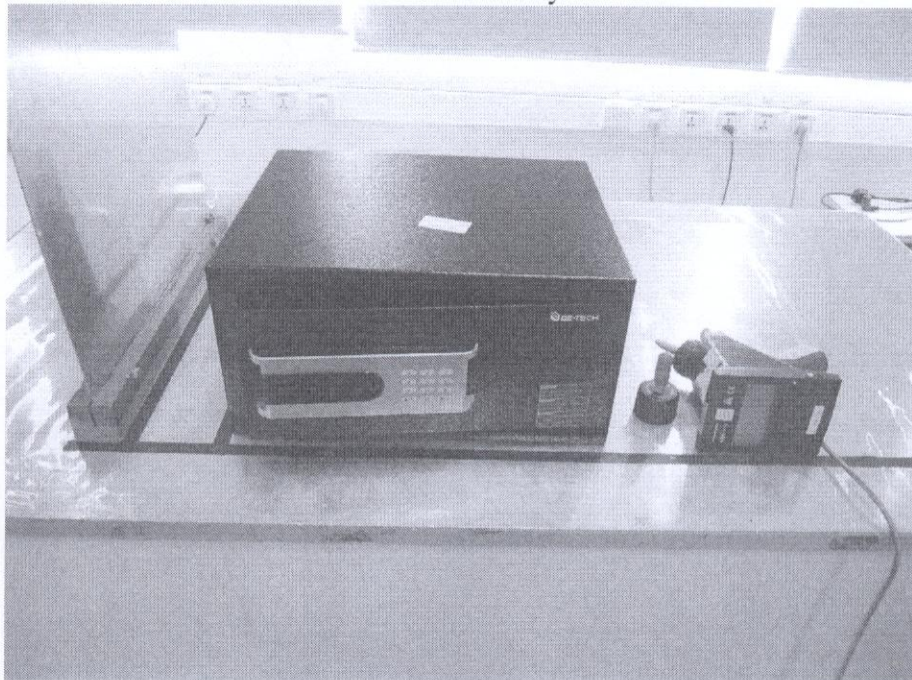

Radiated EM field Immunity

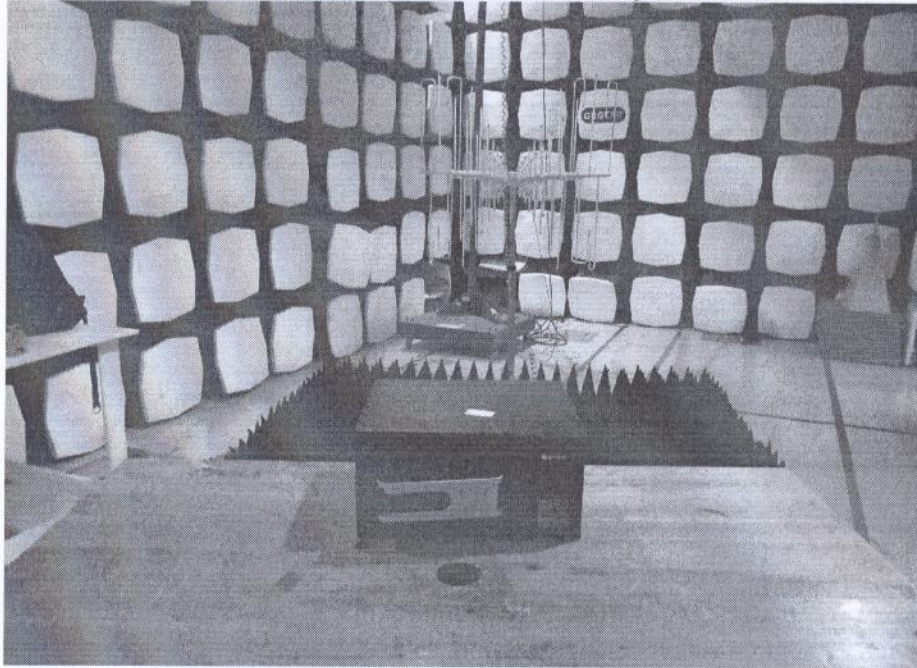

9 Appendix II - Photos of EUT

